



12 GAUGE / 14 CONDUCTOR ENTERTAINMENT LIGHTING CABLE

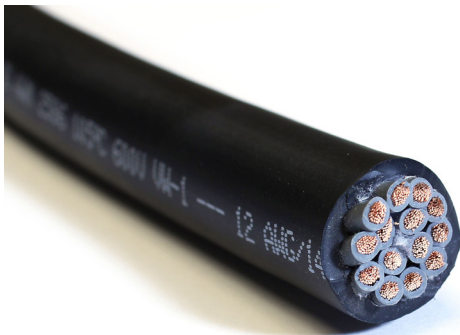

FEATURES:

- Configuration of singles match orientation of industry 19-pin connectors for simple assembly
- Easy-to-read print on each single conductor for clear identification
- Specially formulated rubber-like jacket designed to withstand repetitive coiling
- Paper separator allows for ease of stripping
- Operating temperatures from -40°C to 105°C
- Flame retardant to UL VW-1

SPECIFICATIONS:



PRINT LEGEND SINGLES:

- Numbered (1) through (14)
- Outer: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10
- Inner Core: 11, 12, 13, 14
- Singles identified with easy-to-read alternatively inversed numbering as shown: 4 - FOUR R U O F - 4

CONDUCTOR;

- 12 gauge
- 65 strands
- .010" bare copper

INSULATION SINGLES;

- PVC compound; 105°C
- .144" +/- .003" OD
- .026" Min. Avg. Wall
- Grey insulation

JACKET;

- PVC compound; 105°C
- .795" +/- .015" OD
- .080" Min. Avg. Wall
- Matte black jacket

- Rated to 600 Volts
- Packaging
1,000' on 36"x16" reel
- Product Weight
490lb/1,000'
- Paper Separator
- UL Recognized for AWM Style # 2586
- UL 758 and CSA 22.2 210-05
- ASTM B-3 Copper Conductors

KALAS MAILING ADDRESS
167 Greenfield Road
Lancaster, PA 17601

TULSA WAREHOUSE
1810 East Jasper St.
Tulsa, Oklahoma 74110

KALASWIRE.COM
P 717-336-5575

Call 888 870-1997 for additional cable specifications. Specifications contained herein reflect current data and are subject to change. Values are nominal and/or approximate.

MADE IN USA