


# PRIMARY WIRE GXL

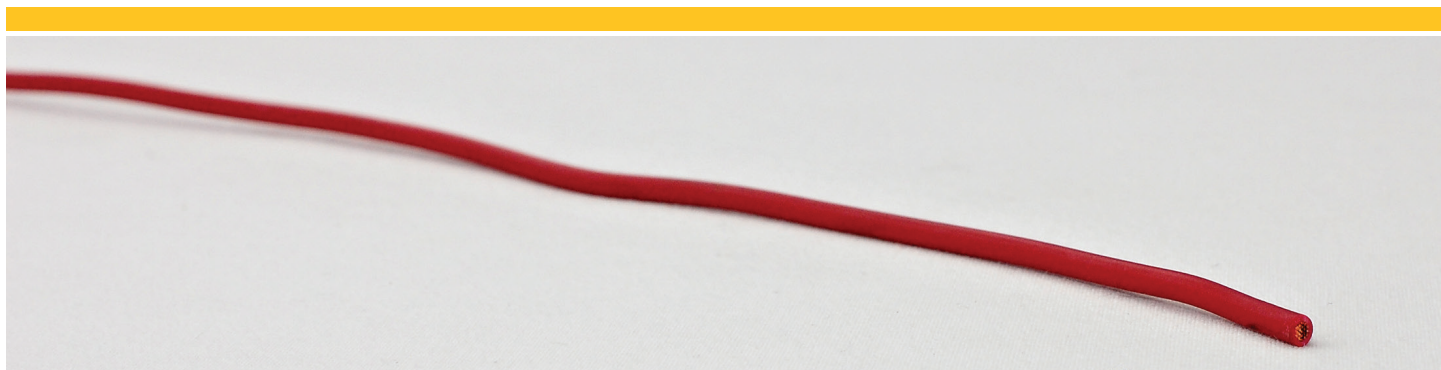

## FEATURES

- Special stranding and packaging are available upon request.
- Resistant to acid, abrasion, alkalis, coolant, diesel fuel, ethanol, flame, gas, ozone, power steering fluid, oil and transmission fluid.
- Custom print available upon request.

## APPLICATIONS

- For use in boats, buses, cars, lift trucks, RV's, tractors and trucks.

## CONSTRUCTION

SAE GXL Primary Wire 60V DC is constructed with flexible stranded copper conductor. Insulation is a high grade RoHS compliant 125°C XLPE. Kalas GXL Primary Wire is constructed to meet the requirements of SAE J1128.

# PRIMARY WIRE GXL



GAUGE	STRANDING	INSULATION THICKNESS		NOMINAL O.D.		STANDARD PACKAGE REEL OR DRUM	SHIPPING WEIGHT -LBS/ 1000 FT.
		in	mm	in	mm		
18	16/.010	0.023	0.58	0.094	2.39	6000 / 50000	8.5
16	19/.0112	0.023	0.58	0.103	2.62	5000 / 30000	11
14	19/.0140	0.023	0.58	0.117	2.97	4000 / 25000	16
12	19/.0177	0.026	0.66	0.142	3.61	2500 / 18000	25
10	19/.0223	0.031	0.79	0.168	4.27	1500 / 12000	39
8	19/.0281	0.037	0.94	0.208	5.28	1000 / 8000	60

Please contact your Kalas representative to discuss ampacity and voltage drop values based on NEC standards.

**KALAS MAILING ADDRESS**  
167 Greenfield Road  
Lancaster, PA 17601

**KALASWIRE.COM**  
P 717-336-5575

**LAS VEGAS WAREHOUSE**  
4320 North Lamb Blvd.  
Suite 300,  
Las Vegas, Nevada 89115

**TULSA WAREHOUSE**  
1810 East Jasper St.  
Tulsa, Oklahoma 74110