


SIS XHHW-2

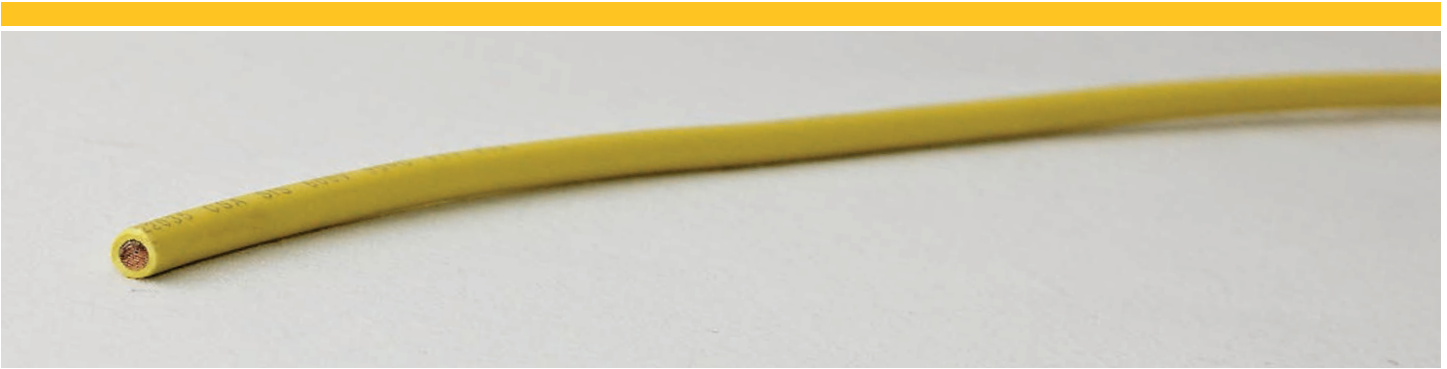

FEATURES

- Special stranding and packaging are available upon request.
- Custom print available upon request.
- UL Listed CSA certified

APPLICATIONS

- SIS for power and control circuits in control panels and switchboards as per NEC
- XHHW-2 for power control as per NEC

CONSTRUCTION

Annealed bare or tinned stranded copper conductor insulated with a high grade XLPE, UL Listed, SIS 90°C Dry XHHW-2 90°C Dry 90°C Wet 600 Volts VW-1 meets UL 44.

OPERATING TEMPERATURE

-40°C to 90°C

SIS XHHW-2



GAUGE	STRANDING	INSULATION THICKNESS		NOMINAL O.D.		STANDARD PACKAGE	SHIPPING WEIGHT ~LBS/ 1000 FT.
		in	mm	in	mm		
12	65/010	0.030	0.76	0.156	3.96	5000	28
10	104/010	0.030	0.76	0.181	4.60	5000	43
8	7/19/0112	0.045	1.14	0.262	6.65	1000	74
6	7/19/0140	0.045	1.14	0.302	7.67	1000	107
4	7/19/0177	0.045	1.14	0.354	8.99	500	163
2	19/7/0223	0.045	1.14	0.434	11.02	500	235
1/0	19/56/010	0.065	1.65	0.545	13.84	500	391
2/0	19/70/010	0.065	1.65	0.595	15.11	500	482
3/0	19/88/010	0.065	1.65	0.652	16.56	500	597
4/0	19/111/010	0.065	1.65	0.717	18.21	500	743

Please contact your Kalas representative to discuss ampacity and voltage drop values based on NEC standards.

KALAS MAILING ADDRESS
167 Greenfield Road
Lancaster, PA 17601

KALASWIRE.COM
P 717-335-0135

LAS VEGAS WAREHOUSE
4320 North Lamb Blvd.
Suite 300,
Las Vegas, Nevada 89115

TULSA WAREHOUSE
1810 East Jasper St.
Tulsa, Oklahoma 74110