


SIS AWM 3173 OR 3195 OR 3196 CL1251

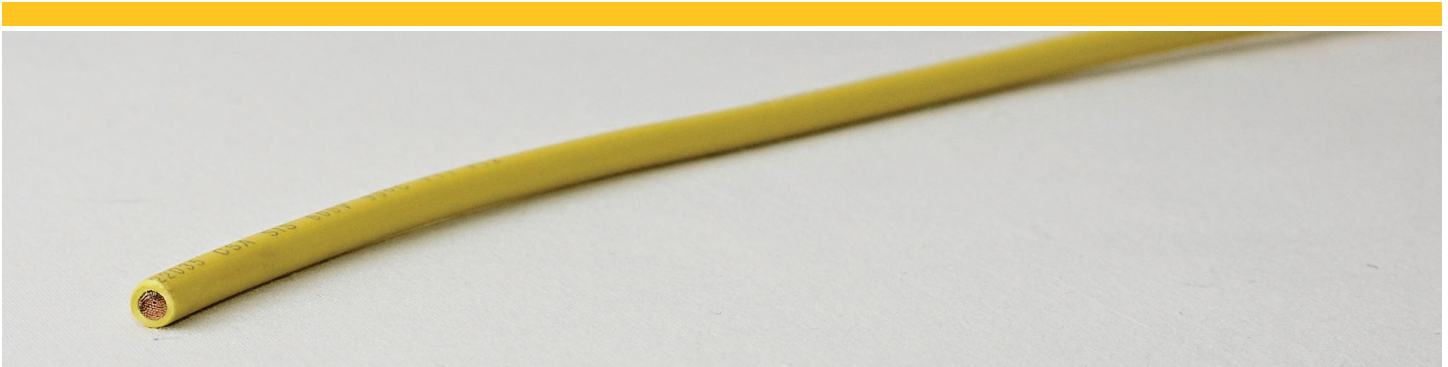

FEATURES

- Special stranding and packaging are available upon request.
- Custom print available upon request.
- UL Listed, UL Recognized and CSA Certified

APPLICATIONS

- Switchboard wiring
- Wiring of Appliances
- Coil Lead Wire

CONSTRUCTION

Annealed tinned or bare copper insulated with a high grade XLPE. UL SIS 90°C or AWM 3173, 3195, 3196 125°C 600 Volts or CSA CL1251 125°C 600 Volts.

OPERATING TEMPERATURE

-40°C to 125°C

SIS AWM 3173 OR 3195 OR 3196 CL1251



GAUGE	WIRE TYPE	STRANDING	INSULATION THICKNESS		NOMINAL O.D.		STANDARD PACKAGE	SHIPPING WEIGHT -LBS/ 1000 FT.
			in	mm	in	mm		
18	UL 3173	16/010	0.030	0.8	0.111	2.8	5000	10
16	UL 3173	26/010	0.030	0.8	0.123	3.1	5000	15
14	SIS, UL 3173	41/010	0.030	0.8	0.136	3.5	5000	19
12	SIS, UL 3173	65/010	0.030	0.8	0.156	4.0	5000	28
10	SIS, UL 3173	104/010	0.030	0.8	0.181	4.6	5000	43
8	SIS, UL 3195	7/19/0112	0.045	1.1	0.263	6.7	1000	74
6	SIS, UL 3196	7/19/0140	0.060	1.5	0.333	8.5	500	122
4	SIS, UL 3196	7/19/0177	0.060	1.5	0.384	9.8	500	179
2	SIS, UL 3196	19/7/0223	0.060	1.5	0.463	11.8	500	276

Please contact your Kalas representative to discuss ampacity and voltage drop values based on NEC standards.

KALAS MAILING ADDRESS
167 Greenfield Road
Lancaster, PA 17601

KALASWIRE.COM
P 717-335-0135

LAS VEGAS WAREHOUSE
4320 North Lamb Blvd.
Suite 300,
Las Vegas, Nevada 89115

TULSA WAREHOUSE
1810 East Jasper St.
Tulsa, Oklahoma 74110