


APPLICATION:

- For threaded Post Battery Cables
- Switch to starter cables
- Power Distribution
- Point to Point Grounding

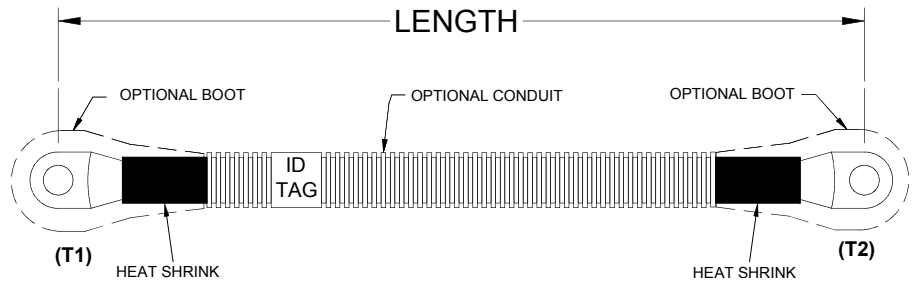

TECHNICAL SPECIFICATIONS

CABLE TYPE:

CABLE	CONDUCTOR	SPECIFICATION	MIN	MAX	INSULATION	FLEXIBILITY	ABRASION
SGX	SAE COPPER	SAE 1127	-40 C	125 C	XLPE	GOOD	BEST
SGR	SAE COPPER	SAE 1127	-40 C	105 C	EPDM	BEST	BETTER
WELDING	SAE COPPER	SAE 1127	-50 C	105 C	EPDM	BEST	GOOD
MARINE	UL TINNED COPPER	BC5W2, UL	-50 C	105 C	PVC	BEST	GOOD
UL 3311/3279	UL COPPER	UL 3311/3279	-50 C	105 C	EPDM	BETTER	BETTER

- Used for Battery Cable applications for all major OEMs
- Resistant to acid, abrasion, alkalis, coolant, diesel fuel, ethanol, flame, gas, ozone, power steering fluid, oil and transmission fluid

RING TERMINAL

- Annealed copper per ASTM B-152 or ASTM B-75 with tin plating to ASTM B-545 finish specification
- Closed Barrel design

WIRE PROTECTION

- Nylon rated from -40°C to 150°C
- Excellent abrasion characteristics and excellent resistance to automotive fluids
- UL-94 HB and FMVSS302 Flammability Rating
- Secured in place with tape

HEAT SLEEVE FOR TERMINALS

- Applied to all ring terminals for added corrosion protection to the termination
- Adhesive lined, Flexible Polyolefin rated to 110 C
- UL and CSA Recognized

LENGTH OPTIONS

- Choose your length in 6" increments from center to center of terminals
 - For lengths <18", specify length in 2" increments

PROTECTIVE BOOTS

- Protect against accidental contact with battery or ring terminals
- Protects terminal from dirt, debris and other foreign objects
- Made from PVC rated to 105 C, UL 94 V2 Rated

DON'T SEE WHAT YOU NEED?

Contact us directly for additional customized solutions.

- Phone: 717 336-5575

KALAS MAILING ADDRESS

167 Greenfield Road
Lancaster, PA 17601

TULSA WAREHOUSE

1810 East Jasper St.
Tulsa, Oklahoma 74110

KALASWIRE.COM

P 717-336-5575

MADE IN USA

TS 16949 CERTIFIED
ISO 9001: 2008 CERTIFIED
ISO 14001: 2004 CERTIFIED



RING TO RING CABLE ASSEMBLIES

CREATE YOUR CABLE IN 5 STEPS



BUILD YOUR PART NUMBER:

Make your selection (options in **BLACK**) and use corresponding part ID (in **RED**) to form your custom cable part number.

1. CABLE

COLOR		GAUGE		TYPE	
BLACK	B	4/0	1	SGR	1
RED	R	3/0	2	SGX	2
		2/0	3	WELDING	3
		1/0	4	UL MARINE	4
		1	5	UL 3311 / 3279	5
		2	6		
		4	7		
		6	8		

2. RING TERMINAL #1 (T1)

TYPE	STUD SIZE	BOOT	
T	BLUNT CUT - NO TERMINAL	0	NO 0
	3/16" (5 MM)	1	YES 1
	1/4" (6 MM)	2	
	5/16" (8MM)	3	
	3/8" (10 MM)	4	
	1/2" (12 MM)	5	
	45° BEND - 3/8" (10 MM)	6	
	90° BEND - 3/8" (10 MM)	7	
	45° BEND - 1/2" (12 MM)	8	
	90° Bend - 1/2" (12 mm)	9	

3. RING TERMINAL #2 (T2)

TYPE	STUD SIZE	BOOT	
T	BLUNT CUT - NO TERMINAL	0	NO 0
	3/16" (5 MM)	1	YES 1
	1/4" (6 MM)	2	
	5/16" (8MM)	3	
	3/8" (10 MM)	4	
	1/2" (12 MM)	5	
	45° BEND - 3/8" (10 MM)	6	
	90° BEND - 3/8" (10 MM)	7	
	45° BEND - 1/2" (12 MM)	8	
	90° Bend - 1/2" (12 mm)	9	

4. CABLE PROTECTION

CONDUIT

NOT PROTECTED WITH CONDUIT	N
PROTECTED WITH BLACK CONDUIT	B
PROTECTED WITH RED CONDUIT	R

5. CABLE ASSEMBLY LENGTH

LENGTH*

LENGTH (IN)	#
-------------	---

*Measurement from center to center of terminals

ENTER PART NUMBER HERE: _____ T _____ T _____
 CABLE TERMINAL #1 TERMINAL #2 CABLE PROTECTION LENGTH

KALAS MAILING ADDRESS

167 Greenfield Road
Lancaster, PA 17601

TULSA WAREHOUSE

1810 East Jasper St.
Tulsa, Oklahoma 74110

KALASWIRE.COM

P 717-336-5575

MADE IN USA

TS 16949 CERTIFIED
ISO 9001: 2008 CERTIFIED
ISO 14001: 2004 CERTIFIED