


## APPLICATION:

- For Threaded Post Battery Cables
- Switch to Starter Cables
- Power Distribution
- Grounding Cables

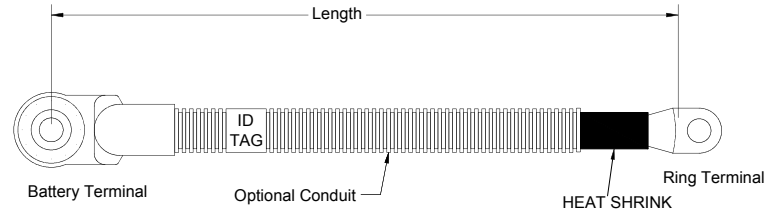

## TECHNICAL SPECIFICATIONS

### CABLE TYPE:

CABLE	CONDUCTOR	SPECIFICATION	MIN	MAX	INSULATION	FLEXIBILITY	ABRASION
SGX	SAE COPPER	SAE 1127	-40° C	125° C	XLPE	GOOD	BEST
SGR	SAE COPPER	SAE 1127	-40° C	105° C	EPDM	BEST	BETTER
WELDING	SAE COPPER	SAE 1127	-50° C	105° C	EPDM	BEST	GOOD
MARINE, MULTI RATE UL	UL TINNED COPPER	BC5W2, UL	-50° C	105° C	PVC	BEST	GOOD
UL 3311/3279	UL COPPER	UL 3311/3279	-50° C	105° C	EPDM	BETTER	BETTER

- Used for Battery Cable applications for all major OEMs
- Resistant to acid, abrasion, alkalis, coolant, diesel fuel, ethanol, flame, gas, ozone, power steering fluid, oil and transmission fluid

### BATTERY TERMINAL

- Copper ring terminals overmolded with protective PVC - protects the termination point
- Standard: with molded feature to accept boot
- Stainless steel battery nut included in standard terminal
- Stackable allows for an additional cable assembly to be terminated of the same stud

### PROTECTIVE BOOTS

- Protect against accidental contact with battery or ring terminals
- Protects terminal from dirt, debris and other foreign objects
- Made from PVC rated to 105 C
- UL 94 V2 rated

### RING TERMINALS

- Annealed copper per ASTM B-152 or ASTM B-75 with tin plating to ASTM B-545 finish specification
- Closed Barrel design

### CABLE PROTECTION

(SLIT CORRUGATED LOOM OR CONDUIT)

- Nylon rated from -40°C to 150°C
- Excellent abrasion characteristics and excellent resistance to automotive fluids
- UL-94 HB and FMVSS302 Flammability Rating
- Secured in place with tape

### HEAT SLEEVE FOR TERMINALS

- Applied to all ring terminals for added corrosion protection to the termination
- Adhesive lined, Flexible Polyolefin rated to 110 C
- UL and CSA Recognized

### DON'T SEE WHAT YOU NEED?

Contact us directly for additional customized solutions.

- Phone: 717 336-5575

#### KALAS MAILING ADDRESS

167 Greenfield Road  
Lancaster, PA 17601

#### KALASWIRE.COM

P 717-335-0135

#### LAS VEGAS WAREHOUSE

4320 North Lamb Blvd.  
Suite 300,  
Las Vegas, Nevada 89115

#### TULSA WAREHOUSE

1810 East Jasper St.  
Tulsa, Oklahoma 74110

#### MADE IN USA

TS 16949 CERTIFIED  
ISO 9001: 2008 CERTIFIED  
ISO 14001: 2004 CERTIFIED



# THREADED POST BATTERY CABLES

## CREATE YOUR CABLE IN 5 STEPS



### BUILD YOUR PART NUMBER:

Make your selection (options in **BLACK**) and use corresponding part ID (in **RED**) to form your custom cable part number.

#### 1. CABLE

COLOR		GAUGE		TYPE	
BLACK	B	4/0	1	SGR	1
RED	R	3/0	2	SGX	2
		2/0	3	WELDING	3
		1/0	4	UL MARINE	4
		1	5	UL 3311 / 3279	5
		2	6		
		4	7		
		6	8		

#### 2. BATTERY TERMINAL

TYPE		STYLE		BOOT	
Molded	M	STANDARD	1	NO	0
		STACKABLE	2	YES	1

#### 3. RING TERMINAL

TYPE	STUD SIZE		BOOT	
T	BLUNT CUT - NO TERMINAL		0	NO 0
	3/16" (5 MM)		1	YES 1
	1/4" (6 MM)		2	
	5/16" (8MM)		3	
	3/8" (10 MM)		4	
	1/2" (12 MM)		5	
	45° BEND - 3/8" (10 MM)		6	
	90° BEND - 3/8" (10 MM)		7	
	45° BEND - 1/2" (12 MM)		8	
	90° Bend - 1/2" (12 mm)		9	

#### 4. PROTECTION

##### CONDUIT

NOT PROTECTED WITH CONDUIT	N
PROTECTED WITH BLACK CONDUIT	B
PROTECTED WITH RED CONDUIT	R

#### 5. CABLE LENGTH

##### LENGTH\*

LENGTH (IN)	#
-------------	---

\*Measurement from center to center of terminals

\*Select 2" increments up to 30", 6" increments >30"

ENTER PART NUMBER HERE: \_\_\_\_\_

M
T

CABLE
BATTERY TERMINAL
RING TERMINAL
PROTECTION
LENGTH

##### KALAS MAILING ADDRESS

167 Greenfield Road  
Lancaster, PA 17601

##### KALASWIRE.COM

P 717-335-0135

##### LAS VEGAS WAREHOUSE

4320 North Lamb Blvd.  
Suite 300,  
Las Vegas, Nevada 89115

##### TULSA WAREHOUSE

1810 East Jasper St.  
Tulsa, Oklahoma 74110

##### MADE IN USA

TS 16949 CERTIFIED  
ISO 9001: 2008 CERTIFIED  
ISO 14001: 2004 CERTIFIED